



INDUX A-SHAPES (A_IND)						
	TOD (mm)	HT (mm)	BOD (mm)	Brass capacity (Kg)	Brimful capacity (Litres)	
AN20IND	197	260	145	30	4.0	
AN25IND	210	280	155	36	4.8	
AN30IND	232	290	160	43	5.7	
AN50IND	248	324	180	60	8.0	
AN60IND	280	350	200	77	10	
AN70IND	281	350	208	89	12	
AN80IND	300	397	210	105	14	
AN80IND	307	381	210	103	14	
AN90IND	310	397	220	115	15	
AN100IND	327	413	216	120	16	
AN120IND	338	444	238	140	19	
AN150IND	362	452	250	168	22	
AN200IND	400	493	280	239	32	

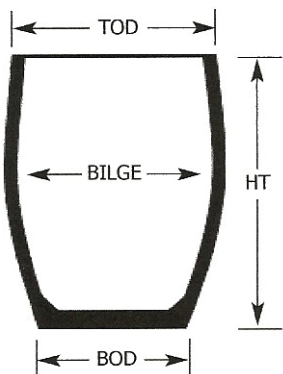

INDUX F-SHAPES (F_IND)						
	TOD (mm)	HT (mm)	BOD (mm)	BILGE (mm)	Brass capacity (Kg)	Brimful capacity (Litres)
F70IND	286	310	227	383	116	15.4
F80IND	300	325	235	400	123	16.4
F90IND	310	335	245	410	148	19.7
F100IND	321	348	249	425	152	20.2
F125IND	330	357	261	441	183	24.4
F150IND	349	378	276	467	209	27.8
F225IND	394	432	318	533	290	38.6

All dimensions are subject to normal manufacturing tolerances. MMS reserves the right to change specifications at any time. Not responsible for any typographic errors.

INDUX E-SHAPES (E_IND)					
	TOD (mm)	HT (mm)	BOD (mm)	Brass capacity (Kg)	Brimful capacity (Litres)
E323IND	165	318	165	25	4.3
E375IND	205	270	195	26	4.4
E305IND	310	500	310	120	21
Additional cylindrical patterns available by special request					

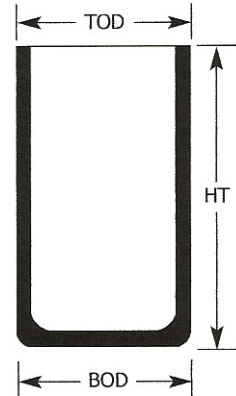

Brass capacity is calculated as follows:
 A-Shapes and F-Shapes - 90% of brimful
 Cylinders - 70% of brimful
 All dimensions are subject to normal manufacturing tolerances
 MMS also supplies a complete range of crucible accessories